



CITY OF MONTPELIER, INDIANA 2023 LTCP PHASE 2 IMPROVEMENTS


COMBINED SEWER SEPARATION PROJECT

61-04D83-12

Project Synopsis

Currently, both sewer and storm drain water go to the treatment plant. This project will allow for separation of the two. When complete, the separation will eliminate the storm water going to the treatment plant, reducing the cost and volume of water being treated.

The project consists of the installation of approximately 8,000 lineal feet of mainline RCP storm sewer pipe, pre-cast storm manholes, storm inlets, approximately 1,500 lineal feet of associated inlet piping, backfill, approximately 300 lineal feet of regrading of an existing open drainage ditch, removal of existing comminutor and associated items, installation of chopper pump conversion kits on existing submersible pumps, erosion control, maintenance of traffic, and site restoration.

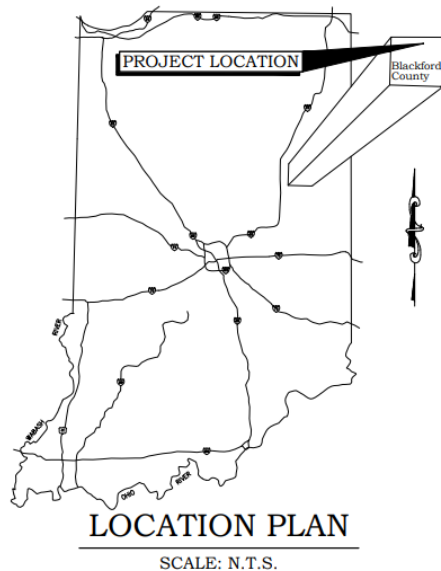

Project Announcement

VTF Excavation, LLC is submitting a Notice of Intent to the Indiana Department of Environmental Management of our intent to comply with the requirements of Construction Stormwater General Permit to discharge stormwater from construction activities associated with City of Montpelier LTCP PH 2 Storm Project, 300 W. Huntington St. Montpelier, IN 47359. Run-off from the project site may discharge to the Salamonie River. Please direct questions to VTF Excavation, LLC at 419-586-3077 or by email at vtfexcavation@gmail.com. Publication dated 10/1/23.